

# DECLARATION OF PERFORMANCE

## DoP No. 174-01 Corner molding 10x10

PVC corner molding with glass mesh

1. Name and/or designation of the construction product type:

**Corner molding 10x10**

2. Type, batch or serial number or some other element that enables identification of the construction product:

**Stamped on the packaging.**

3. Intended use or uses of the construction product in accordance with the appropriate technical specification or technical regulation:

**PVC corner molding with glass mesh.**

4. Name and address of the manufacturer:

**For Banja Komerc Bekament DOO, 132 Kralja Petra Prvog Str., Banja, Arandjelovac, Serbia produces NiP Spasić DOO, Čuprija, Serbia**

5. Name and address of representative: /

6. System or systems of assessment and verification of the constancy of performance of the construction product (AVCP), determined by the appropriate technical specification or technical regulation:


**System 4**

7. Applied technical regulations:

/

8. List of essential characteristics and performance of essential characteristics:



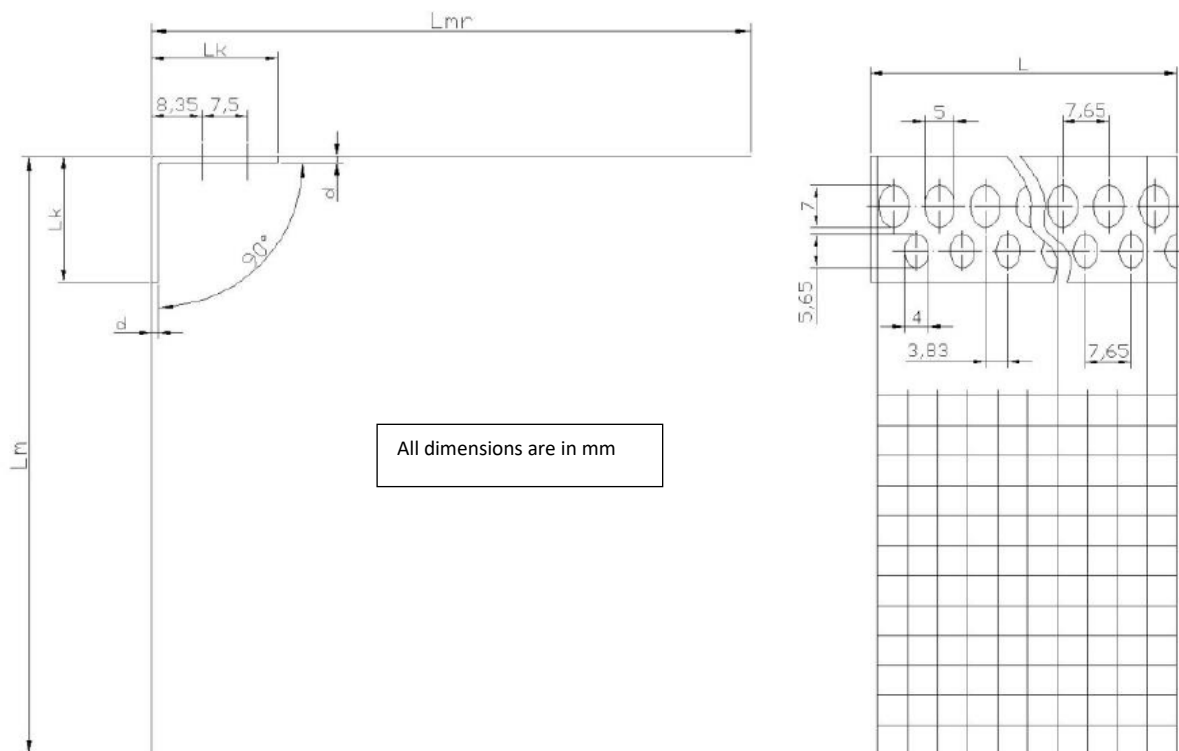

All dimensions are in mm

Product:		CORNER MOLDING 10+10beu 140		
Type:		CORNER MOLDING		
Label:		10+10beu 140		
Product code:		LU140BEU10+10		
Material:		PVC; Facade mesh; Glue		
Purpose:		Mechanical protection of the outer edges of thermal insulation facade systems.		
Packaging:		Box:250m ili 125m; Foil:125m		
Storage:		In a dry place. Do not store directly in the sun.		
Net weight:		1m = 0,090kg ± 0,005kg		2,5m = 0,225kg ± 0,012kg
Material	Description of material	Consumption	Tol.	Unit of measurement
PVC	Hardness: 79HSh; Tensile strength: 33Mpa; Elongation at break: 12.5%; Impact toughness according to Charpy: 2.5KJ/m <sup>2</sup> ; Stabilizer Ca/Zn	0,056	±0,0030	kg/m
Glue	Contact polychloroprene adhesive	0,003	±0,0002	kg/m
Mesh	EU mesh 145gr/m <sup>2</sup> with ETAG004 certificate	0,208	±0,0104	m <sup>2</sup> /m
Dimensions				
L (mm)	Lm (mm)	Lmr (mm)	Lk (mm)	d (mm)
2.500,00 ± 5,00mm	100,00 ± 5,00mm	100,00 ± 5,00mm	21,00 ± 0,50mm	1,10 ± 0,05mm

9. The characteristics of the product are in accordance with the characteristics specified in point 8.

This performance declaration is published in accordance with the Law on Construction Products (Official Gazette of RS, No. 83 of 29 October 2018) and EU Regulation, CPR 305/2011 and is solely the responsibility of the manufacturer specified in point 4.

Vesna Jovanović, BSc in Technology Eng.  
Director of development and technical support

In Banja  
30.07.2023.

Signed

Round official seal: BANJA komerc BEKAMENT DOO V  
Banja Arandjelovac

